

10 Rec'd PCT/PTO 07 JAN 2005

## (12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



INTERNATIONAL PATENT COOPERATION TREATY (PCT)  
PCT/PTO

(43) International Publication Date  
15 January 2004 (15.01.2004)

PCT

(10) International Publication Number  
WO 2004/005169 A1

(51) International Patent Classification: B65G 47/66

(21) International Application Number:  
PCT/NL2003/000504

(22) International Filing Date: 9 July 2003 (09.07.2003)

(25) Filing Language: Dutch

(26) Publication Language: English

(30) Priority Data:  
1021038 9 July 2002 (09.07.2002) NL

(71) Applicant (for all designated States except US): MCC  
NEDERLAND B.V. (NL/NL); Binsteinsstraat 1, NL-2691  
GV 's-Gravenzande (NL).

(72) Inventors; and

(75) Inventors/Applicants (for US only): DE GEUS, Sjoerd  
(NL/NL); Nigieriasstraat 97, NL-2622 GB Delft (NL); VER-  
DULJN, Gijbertus, Johannes (NL/NL); Zeggelaan 77,  
NL-4844 SC Terheijden (NL).

(74) Agent: PRINS, A.W.; Nieuwe Parklaan 97, NL-2587 BN  
Den Haag (NL).

(81) Designated States (national): AB, AG, AL, AM, AT (util-  
ity model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA,

CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (util-  
ity model), DE, DK (utility model), DK, DM, DZ, EC, EE  
(utility model), EE, ES, FI (utility model), FI, GB, GD, GE,  
GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ,  
LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN,  
MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO,  
RU, SC, SD, SE, SG, SK (utility model), SK, SI, SY, TJ,  
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,  
ZM, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,  
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,  
SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM,  
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

## Published:

- with international search report
- before the expiration of the time limit for amending the  
claims and to be republished in the event of receipt of  
amendments

For two-letter codes and other abbreviations, refer to the "Guid-  
ance Notes on Codes and Abbreviations" appearing at the begin-  
ning of each regular issue of the PCT Gazette.

(54) Title: CONVEYING SYSTEM WITH A SLIDE-OVER DEVICE BETWEEN TWO BELT CONVEYORS, SLIDE-OVER  
DEVICE AND INTERMEDIATE ELEMENT WITH A SLIDE-OVER SURFACE

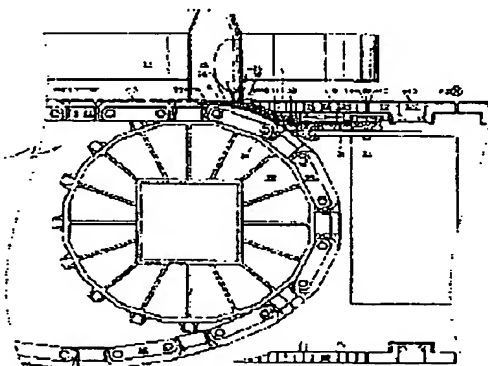

(57) Abstract: A conveying system (1), comprising an endless first conveyor belt (3) circulating between at least first and second (2B) divert elements, a top run (4A) of the first conveyor belt (3) forming a first conveying surface (5) movable between the divert elements in a first conveying direction (P1), and an endless second conveyor belt (7) circulating between at least third and fourth divert elements, the top run (8A) of the second conveyor belt (7) forming a movable second conveying surface (9) movable between the divert elements in a second conveying direction (P2), the second conveyor belt (7) extending at least partly above and along the second divert element (2B), so that the first (3) and second (7) conveyor belts, while including a gap-shaped interspace (10), are in mutually transverse alignment. In the interspace (10), intermediate elements (T), in particular fingers, are arranged that bridge the gap between the first (5) and the second (9) conveying surface.

BEST AVAILABLE COPY

WO 2004/005169 A1

DT15 Rec'd PCT/PTO 07 JAN 2005

WO 2004/005169

PCT/NL2003/000504

CONVEYING SYSTEM WITH A SLIDE-OVER DEVICE BETWEEN TWO BELT CONVEYORS,  
SLIDE-OVER DEVICE AND INTERMEDIATE ELEMENT WITH A SLIDE-OVER SURFACE

This invention relates to a conveying system, comprising an endless first conveyor belt circulating between at least first and second divert elements, a top run of the first conveyor belt forming a first conveying surface  
5 movable between the divert elements in a first conveying direction, and an endless second conveyor belt circulating between at least third and fourth divert elements, a top run of the second conveyor belt forming a second conveying surface movable between the divert elements in a second conveying direction, the top run of the second conveyor belt extending at least partly  
10 above and along the second divert element, so that the first and second conveyor belts, while including a gap-shaped interspace, are in mutually transverse alignment.

Such a conveying system is known from EP 0 722 896.

Conveying systems of the type mentioned in the opening paragraph  
15 hereof are generally known and are used for conveying products in, for instance, the packaging and food industries. The conveyor belts of these systems can be designed, for instance, as rubber mats or metal mesh belts, but also as modular mats or chains from metal and/or plastic. The divert elements can then be designed, for instance, as pulleys, but also, for instance,  
20 as single or multiple chain wheels. In conveying systems, often a number of conveyor belts are connected in succession.

At places where products are to be conveyed to or from the conveying surface, as at right-angled and in-line transitions between conveyor belts and at processing stations, slide-over devices are used. An example of such a  
25 slide-over device is a slide-over plate with fingers that cooperate with grooves formed in the surface of a conveyor belt.

The conveying systems are increasingly used to convey small batches of products. Preferably, the conveying systems are then designed such that

WO 2004/005169

PCT/NL2003/000304

2

the conveying system is self-clearing, without human intervention. A drawback of the slide-over plates, also called finger plates or combs, is that at the end of a production run, the last products remain behind on the slide-over plates.

- 5 To mitigate this disadvantage, the conveying system mentioned in the opening paragraph hereof has been developed. What can be achieved owing to the top run of the second conveyor belt extending at least partly above and alongside the second divert element, is that the conveying surfaces link up without an intervening "dead" area. To make the gap-shaped interspace as small as possible, the longitudinal edge of the second conveyor belt facing the first conveyor belt is provided with a bevel.

- 10 A drawback of the conveying system mentioned in the opening paragraph hereof is that where less stable products are involved, the interspace between the first and the second conveyor belt may be too large, so that the products may fall over. The longitudinal edge of the second conveyor belt then forms, as it were, a bumper. A further disadvantage is that the longitudinal edge mentioned is susceptible to damage resulting from products butting against the edge.

- 20 The object of the invention is to provide a conveying system of the type mentioned in the opening paragraph hereof, by which the disadvantages mentioned can be avoided. To that end, the conveying system according to the invention is characterized in that in the interspace at least one intermediate element is arranged which bridges the gap between the first and the second conveying surface. By the use of an intermediate element, the longitudinal edge of the second conveyor belt can be protected, while furthermore the falling over of products can be prevented. The intermediate element can be manufactured from material that is less sensitive to wear than the conveyor belt and can, for instance, be replaced as a loose unit.

WO 2004/005169

PCT/NL2003/000504

3

The intermediate elements can for instance be provided with a substantially horizontally oriented supporting surface which forms a slide-over surface that is arranged in the entry of the gap-shaped space.

The intermediate elements preferably comprise fingers extending  
6 preferably in uniformly spaced-apart relation, parallel to the conveying  
direction of the first conveyor belt. Back parts of the fingers can then form a  
grid-shaped part of the slide-over surface at the entry of the gap between the  
first conveying surface and the second conveying surface. With the aid of such  
a grid-shaped slide-over surface, not only can products be supported during  
10 slide-over, but also the entry of larger dirt entities into the gap can be  
prevented, while smaller dirt entities can be discharged between the fingers  
via the gap. This is specifically important with modular mats, since in the  
case of such mats the gap size between the first and the second conveyor  
varies. In such a modular conveying mat, the mat, when passing around the  
15 chain wheel, forms a rotating polygon whose angular points may jam dirt  
entities in the gap. Especially in the case of modular mats from plastic  
material, where abrasive pollutions, such as glass frits, may get stuck,  
considerable damages may be prevented by the grid formed by the fingers.

The slide-over surface may then be built up from a substantially closed  
20 part of the supporting surface, with the grid-shaped part contiguous thereto,  
as with a comb or finger plate.

Naturally, the slide-over surface can also be made of fully grid-shaped  
or fully closed design. In the case of a fully grid-shaped slide-over surface, the  
intermediate elements can be formed by loose fingers.

25 The fingers can be made, for instance, of bar-shaped design and may  
optionally be provided with a plate-shaped supporting part of substantially  
upstanding orientation. Naturally, the fingers and the supporting part may  
be integrated to form a single component.

WO 2004/005169

PCT/NL2003/000504

4

In the event of damage to the fingers, the fingers can be replaced individually or in groups, while the longitudinal edge of the conveyor belt remains intact.

5 A further advantage of intermediate elements designed as fingers, or provided with fingers, is that the fingers can cooperate with grooves in the surface of the first conveyor belt, extending in the conveying direction. The fingers are then preferably provided with a first back part which extends from the second conveying surface into the first conveying surface. In this way, the products can be readily moved from the first conveying surface  
10 onto the slide-over surface. Furthermore, in a similar manner, any larger fouling entities can be taken from the first conveying surface, and be discharged via the slide-over surface. Also, as a consequence, the intermediate elements can optionally be supported on the first conveying surface. The grooves in the surface of the conveying mat can for instance be  
15 formed by slots in a substantially flat surface of the conveyor belt, but may also be formed, for instance, between upstanding ribs on the surface of the conveyor belt. The walls and the bottom of the grooves may be staggered or even be locally interrupted.

It will be clear that in such an arrangement the slide-over surface  
20 formed by the backs of the fingers may overlap with the first conveying surface. Furthermore, it will be clear that the non-overlapping part of the slide-over surface forms a stationary, "dead" area. To prevent the possibility of products remaining behind on this slide-over surface when the conveyor belt is running empty, the length of the slide-over surface between the first  
25 conveying surface and the second conveying surface in a first conveying direction is preferably made smaller than the minimum dimension of the base of the product to be conveyed.

It will furthermore be clear that the system can be traversed with products in two directions. In the case of 'ascending' conveyance, the  
30 products are slid over from the first conveying surface via the slide-over

WO 2004/005169

PCT/NL2003/000504

5

surface to the second conveying surface. In the case of 'descending' conveyance, this order is reversed.

By providing the longitudinal edge of the second conveyor belt facing the first conveyor belt with a bevel, the width of the gap can be reduced.

- 5 Such a bevel constitutes a reduction and can have a substantially straight configuration, but can naturally also have a different configuration, such as a concave configuration, a convex configuration or a combined configuration.

- 10 Preferably, the intermediate elements, in particular the fingers, are provided with a further back part which is situated lower with respect to the slide-over surface formed by the first back part, and which is formed to correspond to the bevel of the longitudinal edge of the second conveyor belt. What can thus be achieved is that the intermediate elements can link up very closely with the longitudinal edge of the second conveyor belt.

- 15 In an advantageous embodiment, the intermediate elements, in particular the fingers, reach under the top run of the second conveyor belt. What can thus be achieved is that the intermediate elements can, for instance, be secured on a supporting frame of the second conveyor belt. In a particularly elegant design, the intermediate elements support the top run of the second conveyor belt. What can be achieved by guiding the second conveyor belt over a lower portion of the intermediate elements is that alignment of the second conveying surface relative to the slide-over surface in a height direction is not necessary.

- 25 It is noted that the slide-over surface, the first conveying surface and the second conveying surface do not need to be situated at the same height. Preferably, however, the surfaces referred to are situated substantially at the same height. To effect proper removal of products from the slide-over surface in the case of ascending conveyance, i.e., from the first belt to the second belt, the slide-over surface can be chosen to be slightly lower than the first conveying surface and the second conveying surface. The slide-over surface then forms, for instance, a pit which is lowered relative to the
- 30

WO 2004/005169

PCT/NL2003/000504

6

second conveying surface and the first conveying surface. Also, the slide-over surface can form steps with the first and second conveying surface. In case of descending conveyance, i.e. from the second belt to the first belt, this relation can be the other way around.

5 In a further advantageous embodiment, the intermediate elements comprise fingers which are groupwise connected with a central carrier. In that case, the central carrier together with the fingers can form a comb, which can be replaced as a unit. Also, the fingers may be connected to the central carrier such that they are each separately detachable. The fingers  
10 can then be secured to a support, directly or by way of a central carrier. What can thus be achieved is that a finger can be replaced as a separate unit.

Advantageously, the fingers can be provided with a breaking point in that, for instance, the surface area of the cross section is locally smaller  
15 than at adjacent parts of the finger. What can thus be achieved is that in case of any overloading or damage, the finger breaks off in a predefined manner which does not impede the functioning of the conveying system.

In a further advantageous embodiment, the intermediate elements, in particular the fingers, are arranged so as to be movable transversely to the conveying direction of the first conveyor belt. What can thus be achieved is that any variation in width of the conveyor belt as a result of temperature  
20 change during operation can be accommodated. This is specifically important in the case of wide modular conveying mats from plastic material, such as conveying mats that are used in tunnel pasteurizers, heaters or  
25 coolers. The fingers may then be arranged so as to be slidable each separately or in groups, for instance by slidably connecting the fingers directly or via a central carrier with a support.

The invention further relates to a slide-over device, comprising a central carrier with a number of substantially parallel extending fingers,  
30 back parts of which form a grid-shaped part of a slide-over surface, the

WO 2004/005169

PCT/NL2003/000504

7

slide-over device being further provided with an endless conveyor belt circulating between at least two divert elements, a top run of the endless conveyor belt forming a conveying surface movable between the divert elements in a conveying direction, which conveying surface is substantially contiguous to the slide-over surface. The slide-over surface can then be fully grid-shaped, so that the backs of the fingers link up directly with the conveying surface, but it may also link up with the conveying surface by way of a closed part. Preferably, the fingers extend substantially transversely to the conveying direction of the conveyor belt.

10 The invention furthermore relates to a finger for use in the above-mentioned conveying system or slide-over device.

Further advantageous embodiments of the invention are represented in the description of the drawings and in the dependent claims.

The invention will be further elucidated on the basis of an exemplary embodiment which is represented in a drawing. In the drawing:

15 Fig. 1 shows a schematic perspective view of a conveying system according to the invention; and

Fig. 2 shows a schematic cross section of the conveying system of Fig. 1.

20 It is noted that the figures merely involve a schematic representation of a preferred embodiment of the invention and should merely be construed as a non-limiting exemplary embodiment. In the figures, the same or corresponding parts are designated with the same reference numerals.

Referring to Figs. 1 and 2, there is shown a conveying system 1. The conveying system 1 comprises an endless conveyor belt 3 circulating between first divert wheels 2A (not shown) and second divert wheels 2B. The first conveyor belt 3 comprises a top run 4A and a bottom run 4B. The top run 4A forms a first conveying surface 5 movable between the first and second divert wheels in a first conveying direction represented by arrow P1.

25

30 The conveying system 1 further comprises an endless second conveyor belt 7



WO 2004/005169

PCT/NL2003/000504

8

circulating between third divert wheels 6A (not shown) and fourth divert wheels 6B (not shown). The second conveyor belt 7 comprises a top run 8A and a bottom run 8B. The top run 8A forms a second conveying surface 9, movable between the third and fourth divert wheels in a second conveying direction indicated by the arrow P2. The top run 8A of the second conveyor belt 7 extends at least partly above and alongside the second divert wheels 2B. In particular, the top run 8A of the second conveyor belt 7 extends at least partly above and along a downwardly extending quadrant aligning with the first conveying surface 5, of the second divert element formed by the second divert wheels 2B.

The first conveyor belt 3 and the second conveyor belt 7 are in transverse mutual alignment, thereby including a gap-shaped interspace 10. Arranged in the interspace 10 are intermediate elements T, designed as fingers 11, which bridge the gap 10 between the first conveying surface 5 and the second conveying surface 9. The intermediate elements T are of comb-shaped design and comprise a central carrier 31 with fingers 11. The central carrier 31 defines a substantially flat, closed part V of the slide-over surface, while the back parts of the fingers form a grid-shaped part R of the slide-over surface.

In this exemplary embodiment, the conveying system 1 further comprises a third endless conveyor belt 12, which circulates between fifth and sixth divert wheels, not shown. The third conveyor belt 12 runs parallel to the second conveyor belt 7, while the third conveying surface 13 formed by the top run of the third conveyor belt 12 is situated substantially in the same plane as the second conveying surface 9. The third conveying surface 13 moves between the fifth and the sixth divert wheels, preferably in the same direction as the second conveying surface 9, that is, in the second conveying direction indicated by arrow P2. The second conveyor belt 7 and the third conveyor belt 12 bound each other by their longitudinal edges 14 and 15, respectively.

WO 2004/005169

PCT/NL2003/000504

9

A product 16, in this exemplary embodiment a bottle, moves along the path indicated by the arrow P3 over the conveying path formed by the conveyor belts 3, 7 and 12. The products 16 are supplied in the first conveying direction P1 and are moved along a guide 17 from the first conveying surface 5, via the grid-shaped part R of the slide-over surface 22 formed by the back parts 26 of the fingers 11, and the closed part V of the slide-over surface 22 formed by the central carrier, onto the second conveying surface 9. By the use of the fingers 11, the longitudinal edge 18 of the second conveyor belt 7 is protected, while further the falling over of products 16 is prevented. To avoid the possibility that products, when the conveyor path is running empty, remain standing on the slide-over surface 22, the length of the slide-over surface 22 between the first conveying surface 5 and the second conveying surface 9, viewed in the first conveying direction, that is, in the direction of arrow P1, has been chosen to be less than the minimum dimension of the base 23 of a product 16 to be conveyed. Optionally, any products that remain standing on the slide-over surface 22 can be pushed on in a mechanical manner, for instance with an arm or with a vibrating device.

Upon arrival at the second conveying surface 9, the products 16 are moved further via the guide 17 onto the third conveying surface 13 of the third conveyor belt 12. Because the second conveyor belt 7 and the third conveyor belt 12 run in the same direction, the gap-shaped interspace 19 included between the second conveyor belt 7 and the third conveyor belt 12 can be very narrow, thus avoiding problems of damage to the longitudinal edge 15 and products falling over.

It is noted that the grid-shaped part R of the slide-over surface 22 may link up directly with the second conveying surface 9. The central carrier 31 or the finger 11 may then continue under the second conveying surface 9; in that case, the closed part V of the slide-over surface 22 is not present.

WO 2004/005169

PCT/NL2003/000504

10

For the sake of good order, it is further noted that the third conveyor belt 12 as such is not requisite. If desired, just a second conveyor belt 7 will suffice. Optionally, the second conveyor belt 7 can be designed to have a large width transversely to the second conveying direction P2.

5           However, the fingers 11 and the second conveyor belt 7 may be part of a slide-over device 20 which is placed in-between the first conveyor belt 3 and the third conveyor belt 12. This can provide the advantage that the first and third conveyor belts can each have their own track construction and that the slide-over device 20 is supported independently. In the exemplary  
10           embodiment represented here, however, the slide-over device 20 is supported on the frame 21 of the third conveyor belt 12.

          The slide-over device 20 can also be applied between a first conveyor belt 3 and a third conveyor belt 12 whose conveying directions are equally directed. In the case of such a tail-end transition between the conveyors, the  
15           slide-over device 20 can be placed between the two conveyor belts, so that the second conveyor belt 7 has one extreme longitudinal edge 18 extending above and along the second chain wheels 2B of the first conveyor and has another extreme longitudinal edge 14 extending above and along the fifth chain wheels of the third conveyor belt. For the sake of good order, it is  
20           noted here that the second conveyor belt may be built up from a number of parallel conveyor belts, such as a number of chain tracks running next to each other. Naturally, also the first and the third conveyor belts can be built up from several parallel belts whose top runs in each case jointly form a conveying surface.

25           In the following, a few constructional details of the exemplary embodiment represented here will be further elucidated.

          The first conveyor belt 3 is designed as a modular conveying mat which is built up from a number of successive modules 23A in conveying direction P1, which have been coupled through hinge pins 24. Transversely  
30           to the conveying direction P1, the mat is built up from a number of

WO 2004/005169

PCT/NL2003/000504

11

juxtaposed rows of modules 23A which have been coupled according to a brick pattern by the hinge pins 24 extending throughout width of the mat. The construction of such a modular conveying mat is known to those skilled in the art, for instance from US 3,870,141, WO 00/13993 or EP 0 903 247.

5       The second conveyor belt 7 is here likewise designed as a modular conveying mat from plastic material. This modular conveying mat is built up from just a single row of successive modules 23B in the second conveying direction P2, coupled by means of hinge pins (not shown). The longitudinal edge 15 proximal to the first conveyor belt 3 is provided with a bevel to  
10       make the gap-shaped interspace 10 between the first conveyor belt 3 and the second conveyor belt 7 as small as possible. Such a beveled conveying mat is known, for instance, from EP 0 722 896. It is noted that the bevel may also be built up from separate modules which are secured to longitudinal edges of the individual modules 23.

15       The third conveyor belt 12 is built up from a number of parallel tracks of modular chain. Each chain track is built up from a number of successive modules 23C in conveying direction P2, coupled by hinge pins. The hinge pins couple only the successive modules of a chain track, so that the juxtaposed tracks of the chain are not coupled. Such a modular chain is  
20       known to those skilled in the art and is described *inter alia* in EP 0 344 411 or EP 0 700 848.

      The fingers 11 are plate-shaped and extend next to each other, upstanding, equidistantly spaced, parallel to the first conveying direction P1. Back parts 26 of the fingers 11 form a grid-shaped slide-over surface 22  
25       at the entry 27 of the gap 10.

      The fingers 11 cooperate with grooves 28 extending in conveying direction P1 in the surface of the first conveyor belt 7. The slide-over surface 22 formed by the back parts 26 of the fingers 11 overlaps the first conveying surface 5: the fingers 11 reach into the first conveying surface 5. The fingers  
30       11 are provided with a further back part 28 which has been formed to

WO 2004/005169

PCT/NL2003/000504

12

correspond to the bevel 29 of the longitudinal edge 18 of the second conveyor belt 7 facing the first conveying mat. By way of their plate-shaped supporting parts 30, the fingers 11 reach under the top run 8A of the second conveyor belt 7. The fingers support the top run 8A of the second conveyor belt 7 and form a guide 32 for the guiding projections 33 of the modules 23B of the top run 8A of the second conveyor belt 7. The first conveying surface 5, the second conveying surface 9 and the slide-over surface 22 are situated substantially at the same level. As shown, the slide-over surface 22 can be chosen to be just slightly lower than the second conveying surface 9, which in turn is situated just slightly lower than the first conveying surface 5. The fingers 11 are here each non-detachably connected with a central carrier 31. The fingers 11 are connected to the frame 21 by way of the central carrier 31, such that they are slidable transversely to the conveying direction P1 of the first conveyor belt 3, that is, in the conveying direction P2 of the second conveyor belt 7. To that end, the central carrier 31 is supported on a support 33 arranged on the track frame 21 of the third conveyor belt 12, but, as stated, may also be supported by an independent frame. Naturally, the fingers can also be supported on the track frame of the first conveyor belt 3. Accordingly, the slide-over device can be supported on the track frame of the first and/or the second conveyor belt and may further be supported on a frame of its own.

It is noted that the individual fingers can be differently designed, and the interspace between the successive fingers can be different, for instance when the pattern of grooves in the first conveyor belt 3 has been chosen to be of a design with alternating interspaces or of an irregular design. Also, a supporting surface formed by the intermediate elements can be designed as a slide-over plate which may or may not be provided with apertures or grooves, which is arranged in the entry of the gap-shaped interspace.

Furthermore, instead of being designed as a modular conveying mat, a conveyor belt can also be manufactured in one piece.

WO 2004/005169

PCT/NL2003/000304

13

In addition, both the first and the second conveyor belt can circulate between more than two divert elements. For instance, the second conveyor belt can circulate in a rectangle, passing around four divert elements, while optionally a further divert element may be used to tension the belt.

- 5 It will be clear that the invention is not limited to the embodiment described here. It will be clear to those skilled in the art that many variations are possible within the scope of the invention as set forth in the following claims.

WO 2004/005169

PCT/NL2003/000504

14

## CLAIMS

1. A conveying system, comprising an endless first conveyor belt circulating between at least first and second divert elements, a top run of the first conveyor belt forming a first conveying surface movable between the divert elements in a first conveying direction, and an endless second  
5 conveyor belt circulating between at least third and fourth divert elements, a top run of the second conveyor belt forming a second conveying surface movable between the divert elements in a second conveying direction, the top run of the second conveyor belt extending at least partly above and along the second divert element, so that the first and second conveyor belts,  
10 while including a gap-shaped interspace, are in mutually transverse alignment, characterized in that in the interspace at least one intermediate element is arranged which bridges the gap between the first and the second conveying surface.
2. A conveying system according to claim 1, wherein in the interspace a  
15 plurality of intermediate elements are arranged, and wherein back parts of the intermediate elements, at the entry of the gap between the first conveying surface and the second conveying surface, form a grid-shaped part of a slide-over surface between the first and the second conveying surface.
- 20 3. A conveying system according to claim 2, wherein the intermediate elements are designed as mutually spaced apart fingers extending in the first conveying direction.
4. A conveying system according to claim 3, wherein the fingers  
25 cooperate with grooves in the surface of the first conveyor belt, extending in the first conveying direction.

WO 2004/005169

PCT/NL2003/000504

15

5. A conveying system according to any one of the preceding claims, wherein the grid-shaped part of the slide-over surface extends from the second conveying surface into the first conveying surface.
6. A conveying system according to any one of the preceding claims, wherein the longitudinal edge of the second conveyor belt that faces the first conveyor belt is provided with a bevel.
7. A conveying system according to claim 6, wherein the at least one intermediate element is provided with a further back part which is located lower with respect to the slide-over surface formed by the first back part and which is formed to correspond to the bevel.
8. A conveying system according to any one of the preceding claims, wherein the at least one intermediate element reaches under the top run of the second conveyor belt.
9. A conveying system according to any one of the preceding claims, wherein the at least one intermediate element supports the top run of the second conveyor belt.
10. A conveying system according to any one of the preceding claims 2-9, wherein the intermediate elements each comprise a plate-shaped supporting part of substantially upright orientation.
11. A conveying system according to any one of the preceding claims 2-10, wherein the intermediate elements are groupwise connected with a central carrier.
12. A conveying system according to any one of the preceding claims 2-10, wherein the intermediate elements are provided with a breaking point.
13. A conveying system according to any one of the preceding claims 2-11, wherein the intermediate elements are arranged such that they are slidable transversely to the conveying direction of the first conveyor belt.
14. A conveying system according to any one of the preceding claims, wherein the first and/or the second conveyor belt is/are built up from one or more rows of successive modules in the conveying direction of the conveyor



WO 2004/005169

PCT/NL2003/000504

16

belt, which modules are pivotally coupled with the aid of hinge pins extending transversely to the conveying direction of the conveyor belt.

15. A slide-over device, comprising a central carrier with a number of mutually spaced apart, substantially parallel extending fingers, back parts of the fingers forming a grid-shaped part of a slide-over surface, characterized in that the slide-over device is provided with an endless conveyor belt circulating between at least two divert elements, a top run of the endless conveyor belt forming a conveying surface movable between the divert elements in a conveying direction, which conveying surface is in substantially flat alignment with the slide-over surface.
16. A slide-over device according to claim 13, wherein the fingers extend substantially transversely to the conveying direction of the conveyor belt.
17. A slide-over device according to claim 13 or 12, wherein the fingers support the top run of the second conveyor belt.
18. An intermediate element for a conveying system or slide-over device according to any one of the preceding claims, comprising at least a bar- or plate-shaped element having a first back part which during use forms a slide-over surface and a further back part which is staggered with respect to the first back part and which during use is located lower with respect to the slide-over surface and which is formed to correspond to the longitudinal edge of a conveying mat.

**WO 2004/005169**

**PCT/NL2003/000504**

1/2

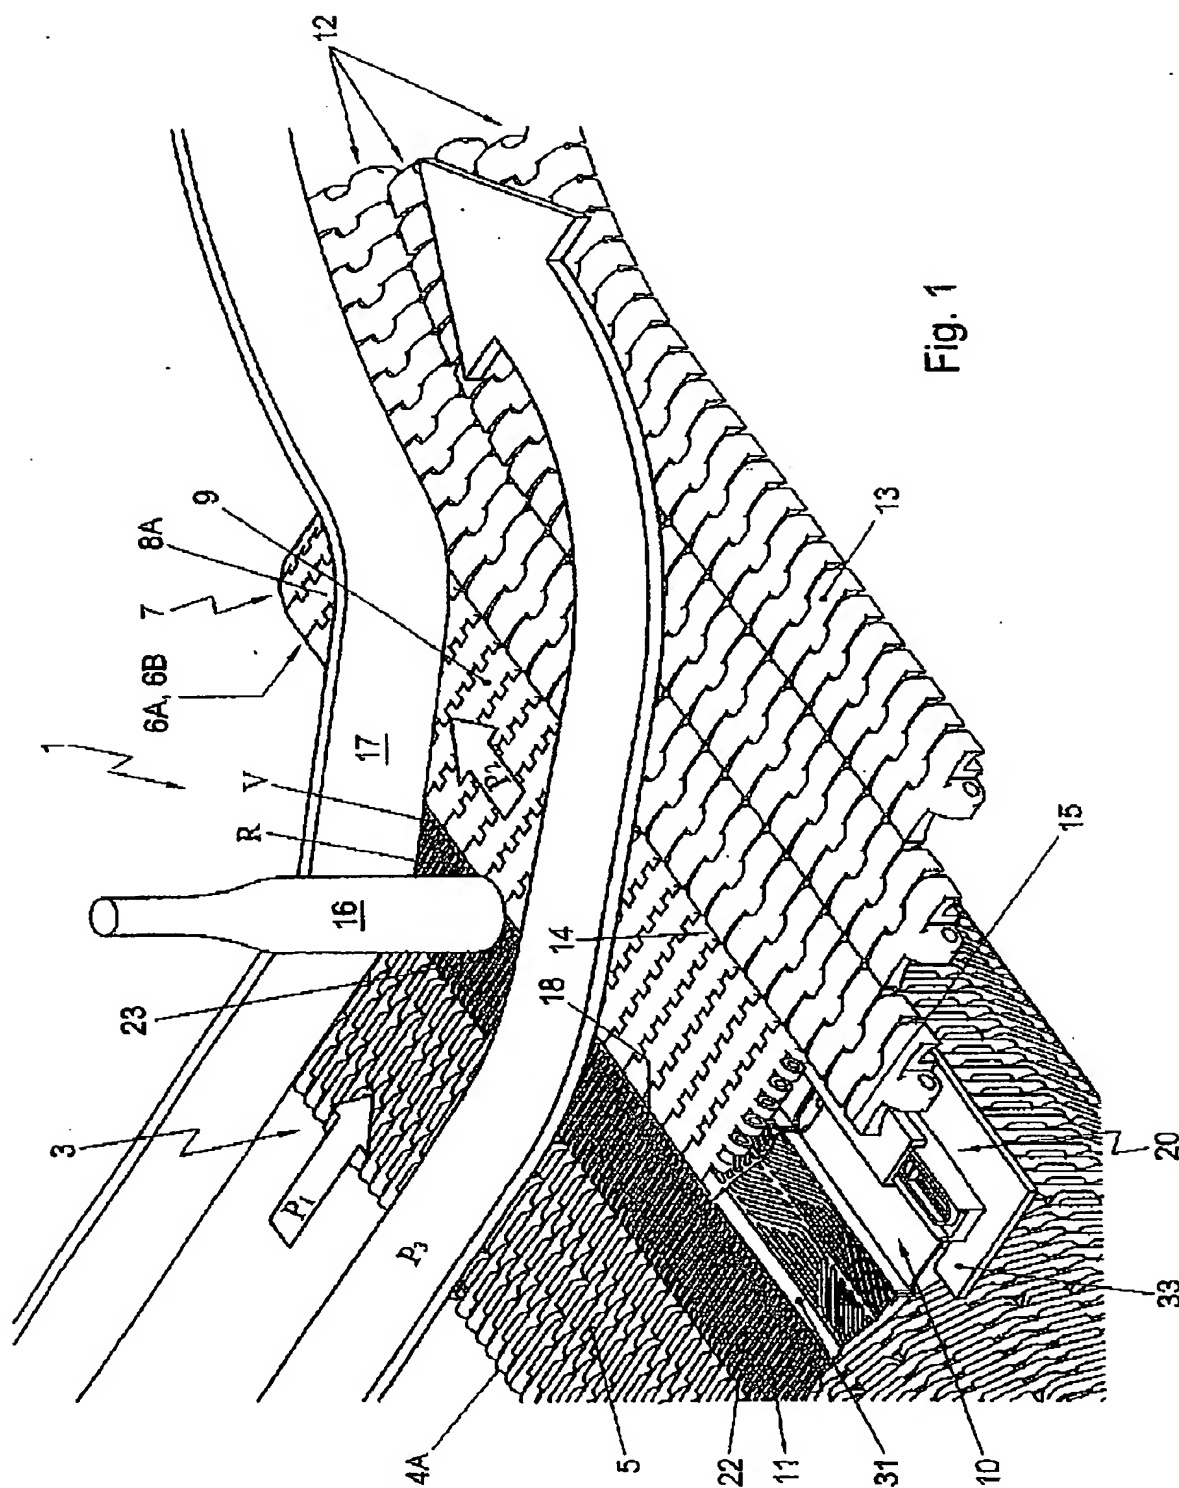



Fig. 1

WO 2004/005169

2/2

PCT/NL2003/000504

Fig. 2

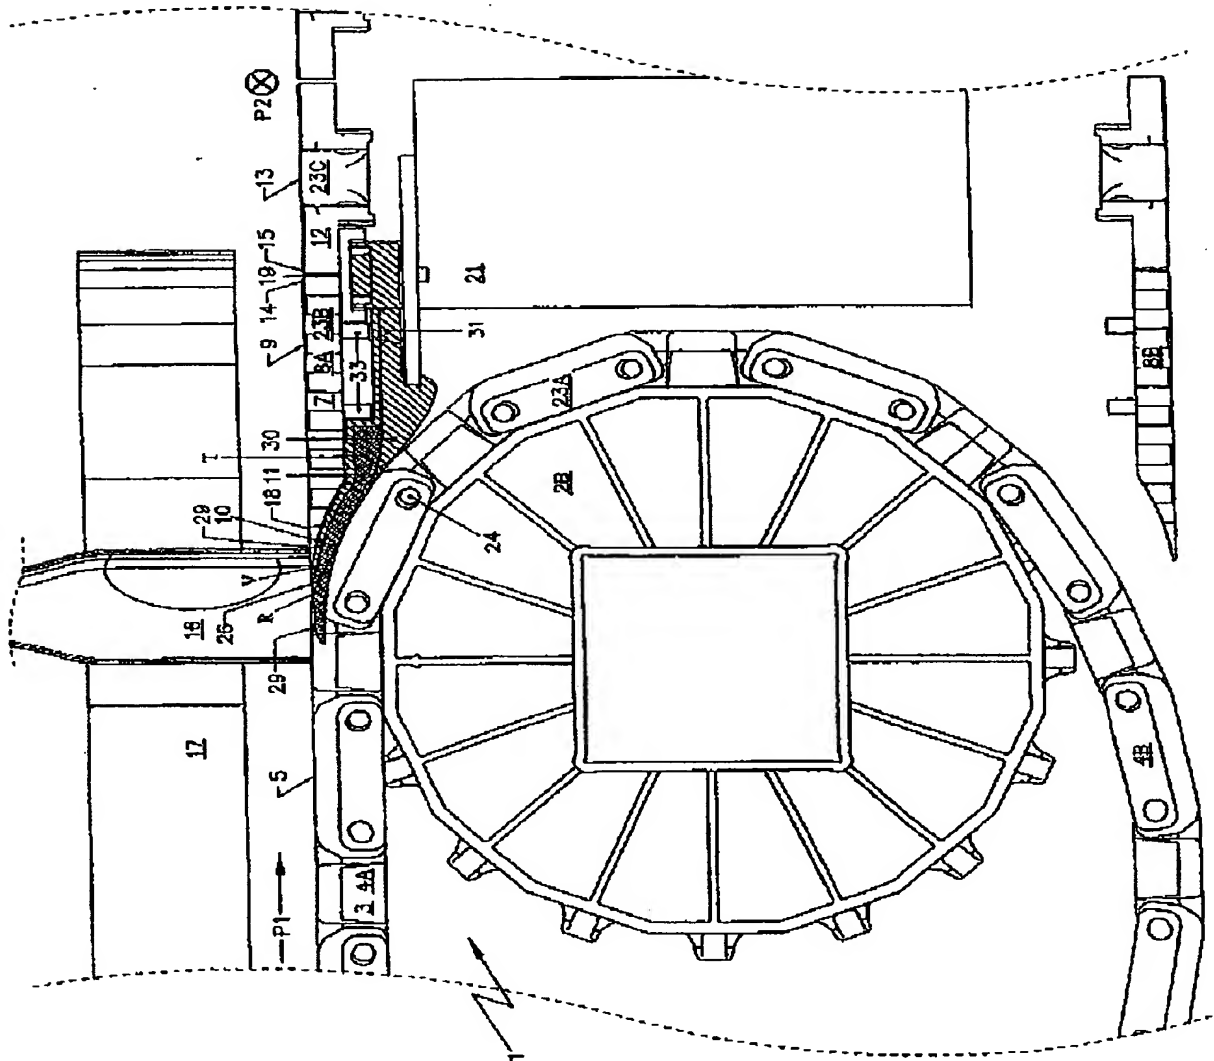

## INTERNATIONAL SEARCH REPORT

PCT/NL 03/00504

A. CLASSIFICATION OF SUBJECT MATTER  
IPC 7 B65647/66

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B656

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X Y	DE 25 08 275 A (ENZINGER UNION WERKE AG) 16 September 1976 (1976-09-16) page 5 -page 6; figures 1-3	1,8,9, 14,18 2-5,10, 11,13, 15-17
Y	EP 0 930 254 A (MCC NEDERLAND) 21 July 1999 (1999-07-21)  paragraph '0006!; figures 1,2,6,7 paragraph '0010! paragraph '0034! - paragraph '0036!	2-5,10, 11,13, 15-17
X Y	DE 196 32 376 A (TOP FOERDERTECHNIK GMBH) 12 February 1998 (1998-02-12) column 3, line 12 - line 19; figure 3	1,8,9, 14,18 2-5,10, 11,15-17
	-/-	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex

## \* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

\*Z\* document member of the same patent family

Date of the actual completion of the international search

5 November 2003

Date of mailing of the international search report

14/11/2003

Name and mailing address of the ISA

European Patent Office, P.B. 5618 Patentpark 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax (+31-70) 340-3016

Authorized officer

Schneider, M

## INTERNATIONAL SEARCH REPORT

PCT/NL 03/00504

## C. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6 138 819 A (CHRISTIANA SANDRA A ET AL) 31 October 2000 (2000-10-31) column 1, line 8 - line 67; figures 2,5,6	2-5,10, 11,15-17
X	DE 26 04 705 A (CHAUNIER ALFRED GABRIEL) 11 August 1977 (1977-08-11) page 7, paragraph 1; figure 2	1,8,9
A	DE 87 00 878 U (NIKO KONSERVEN MASCHINENFABRIEK) 5 March 1987 (1987-03-05) page 5--page 6; figures 1,2	

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

## INTERNATIONAL SEARCH REPORT

PCT/NL 03/00504

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
DE 2508275	A	16-09-1976	DE 2508275 A1	16-09-1976
EP 0930254	A	21-07-1999	NL 1008070 C2	20-07-1999
			AU 745795 B2	28-03-2002
			AU 1211999 A	05-08-1999
			BR 9900101 A	04-01-2000
			DE 69906829 D1	22-05-2003
			DK 930254 T3	11-08-2003
			EP 0930254 A1	21-07-1999
			JP 11263434 A	28-09-1999
			TW 436456 B	28-05-2001
			US 6296110 B1	02-10-2001
			ZA 9900312 A	30-07-1999
DE 19632376	A	12-02-1998	DE 19632376 A1	12-02-1998
			DE 19646284 A1	14-05-1998
US 6138819	A	31-10-2000	AU 712396 B2	04-11-1999
			AU 7827298 A	30-12-1998
			DE 69814808 D1	26-06-2003
			DK 923499 T3	01-09-2003
			EP 0923499 A1	23-06-1999
			JP 2000516900 T	19-12-2000
			WO 9856694 A1	17-12-1998
DE 2604705	A	11-08-1977	DE 2604705 A1	11-08-1977
DE 8700878	U	05-03-1987	DE 8602421 U1	13-03-1986
			DE 8700878 U1	05-03-1987

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**